


# LBH6515

SPECIFICATION SHEET

## SOLAR

Standard

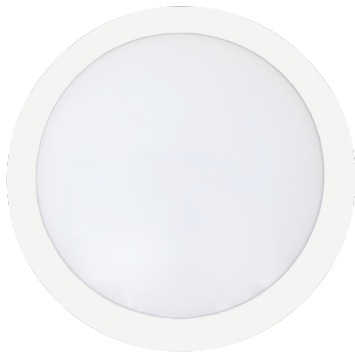

Eyelid



Grille



### DESCRIPTION

- 15W IP65 surface mounted round LED bulkhead.
- 4000K
- 1000lm, 67lm/w
- Emergency Output: 200lm
- CRI > 80
- 110° Beam Angle
- SMD 5730 LED
- Constant Current Driver
- 90-240V AC 50/60Hz
- UV stabilized PC Base & Opal Diffuser
- 50,000 Hour Lifetime
- 2 Year Guarantee


CODE	OPTIONAL TRIMS
LBH6515	Standard - No Trim
LBH6515G	Half Grille
LBH6515L	Eyelid

CODE	OPTIONS
LBH6515	Standard
LBH6515MS	Microwave sensor
LBH6515M3	3 hours emergency backup
LBH6515MSM3	Microwave sensor and 3 hours emergency backup

### CLASSIFICATION

CE IP65 RoHS

### DIMENSIONS/DRAWING

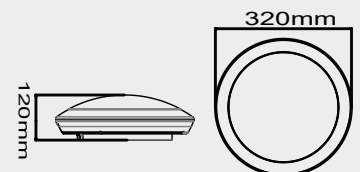

### FINISH



Emco House, Units 6-10, Marshgate Drive  
Hertford, Hertfordshire, SG13 7JY, UK

*Subject to change without prior notice. E & OE.*

sales5@emcogroup.co.uk Tel: 01992 582033  
www.emcogroup.co.uk Fax: 01992 582044

**emcogroup**  
LIMITED

emcolite

emcosafe

emcovent

**EMCOLED**

**FIREBLOK**

**rio**