


LDL313

SPECIFICATION SHEET

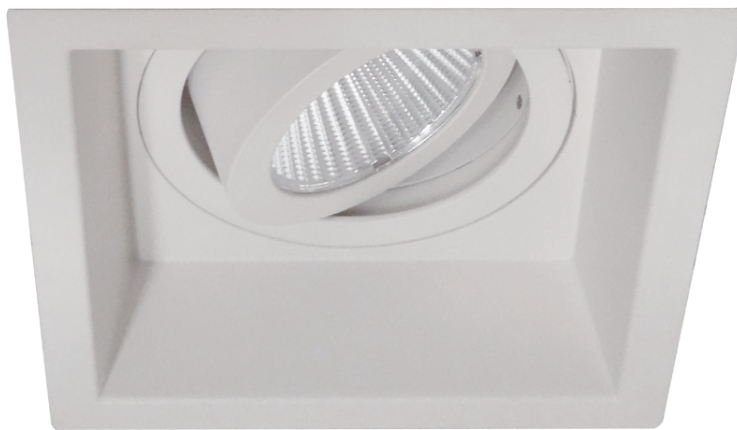

DESCRIPTION


- 10W LED Downlight c/w driver.
- 3000K - 89lm/W
- CRI 80
- Aluminium Material
- Tilting Angle: 350° Rotate ~ 60° Vertical
- Input Voltage: 100-240V 50/60Hz
- Works with our **EML15605ML** emergency pack
- 5 Year Guarantee

CODE	WATTAGE	BEAM ANGLE	COLOUR TEMP.	LUMENS	CRI
LDL3132	10	24°	3000K	890lm	80
LDL3134	10	40°	3000K	890lm	80

CLASSIFICATION



DIMENSIONS/DRAWING

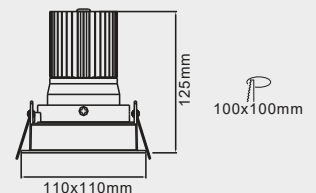

FINISH

MATT
WHITE

Emco House, Units 6-10, Marshgate Drive
Hertford, Hertfordshire, SG13 7JY, UK

Subject to change without prior notice. E & OE.

sales5@emcogroup.co.uk Tel: 01992 582033
www.emcogroup.co.uk Fax: 01992 582044

emcogroup
LIMITED

emcolite

emcosafe

emcovent

EMCOLED

FIREBLOK

rio