


NSBRGBCONT

SPECIFICATION SHEET

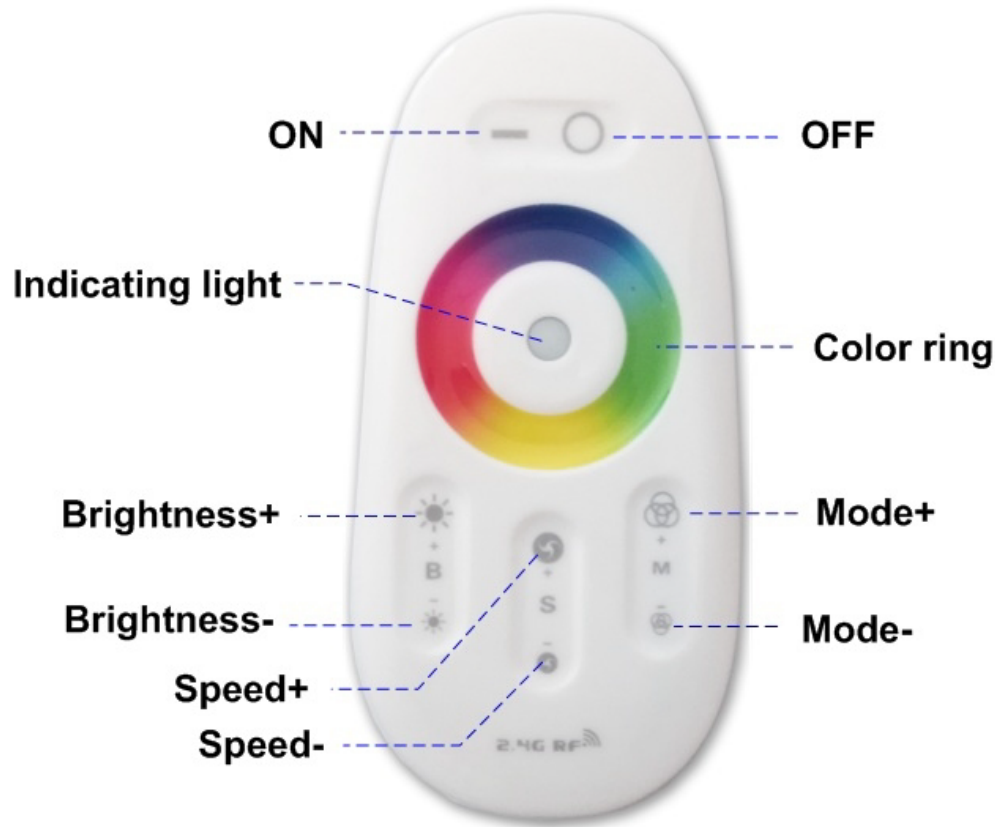

DESCRIPTION

- RGB LED Strip Controller & 2.4G Radio Touch Screen Remote
- Remote Dimming Control
- 20 Pre-Programmed Functions
- Long Distance Transmission With Strong Anti-interference Technology
- Touch Screen Remote With Interactive colour Wheel
- 2.4G Radio Remote Control Does not require line of sight to work
- Works with **EMCOLED NSB-24-6810-RGB**
- 1 Year Warranty

Controller :

- Working temperature : $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- Supply Voltage : DC 12V-24V
- Output : 3 Circuit
- Connection mode : common anode
- Static power consumption : $<1\text{W}$
- Output Current : $<6\text{A}/\text{ch}$
- Output Power : 12V: $<216\text{W}$, 24V: $<432\text{W}$

Remote Control :

- Power supply mode : 2 x AAA Battery
- Supply voltage : 3V
- Transmission Frequency : 2400-2483.5MHz
- Modulation Method : GFSK
- Transmission Power : 6db
- Standby Power Consumption : 5uA
- Remote Control Distance : 20-30m

CLASSIFICATION

CE IP20 RoHS

DIMENSIONS/DRAWING

Controller:
L85xW45xH22mm
Remote:
L110xW55xH20mm

FINISH

Emco House, Units 6-10, Marshgate Drive
Hertford, Hertfordshire, SG13 7JY, UK

Subject to change without prior notice. E & OE.

sales@emcogroup.co.uk Tel: 01992 582033
www.emcogroup.co.uk Fax: 01992 582044

emcogroup
LIMITED

emcolite

emcosafe

emcovent

EMCOLED

FIREBLOK

rio